



RUBBER MULCH

...for playgrounds, nurseries, landscaping and residential

A hard wearing, bound rubber shredded surface. Ideal for play areas requiring impact protection and awkward or unusual areas of landscaping.

Mulch can require minimal groundworks and no raised edging. It can be installed onto prepared grass, over grass mats or artificial turf, mounds and tree pits, gravel, paving, old bark pits or to overlay damaged or worn out wetpour.

Preparation is key to getting the mulch as level as possible, although it can follow the natural undulations if necessary.

“ Having completed several high end projects with DCM, we find them very professional and easy to work with.

Their ability to coordinate with other trades makes them ideal for our project needs. They are punctual and remain until the job is done. Their quality of work is second to none and I would have no trouble recommending them. We look forward to working with them in the future.

Contracts Manager, Blue Forest



Key Specifications

- Non-toxic and odourless
- Prevents weed growth while allowing water to permeate into the ground
- Wide range of colours
- Achieve critical fall heights
- Consistent high quality
- Non flammable
- Eco friendly and harmless to health
- Easy to maintain

RECOMMENDED BUILD UP TO CREATE A PERMEABLE SURFACE




- 1 Min 40mm Rubber Mulch*
 - 2 Geotextile
 - 3 Recommended min 50mm MOT type 1 dependent on ground conditions
 - 4 Geotextile layer
 - 5 Edge options; Rubber, Concrete, Timber
- *Option for rubber mulch to be laid directly onto grass with some preparation

T. +44 (0)1772 440340 E. info@dcm surfaces.com

WWW.DCMSURFACES.COM

RUBBER MULCH

Colour Chart

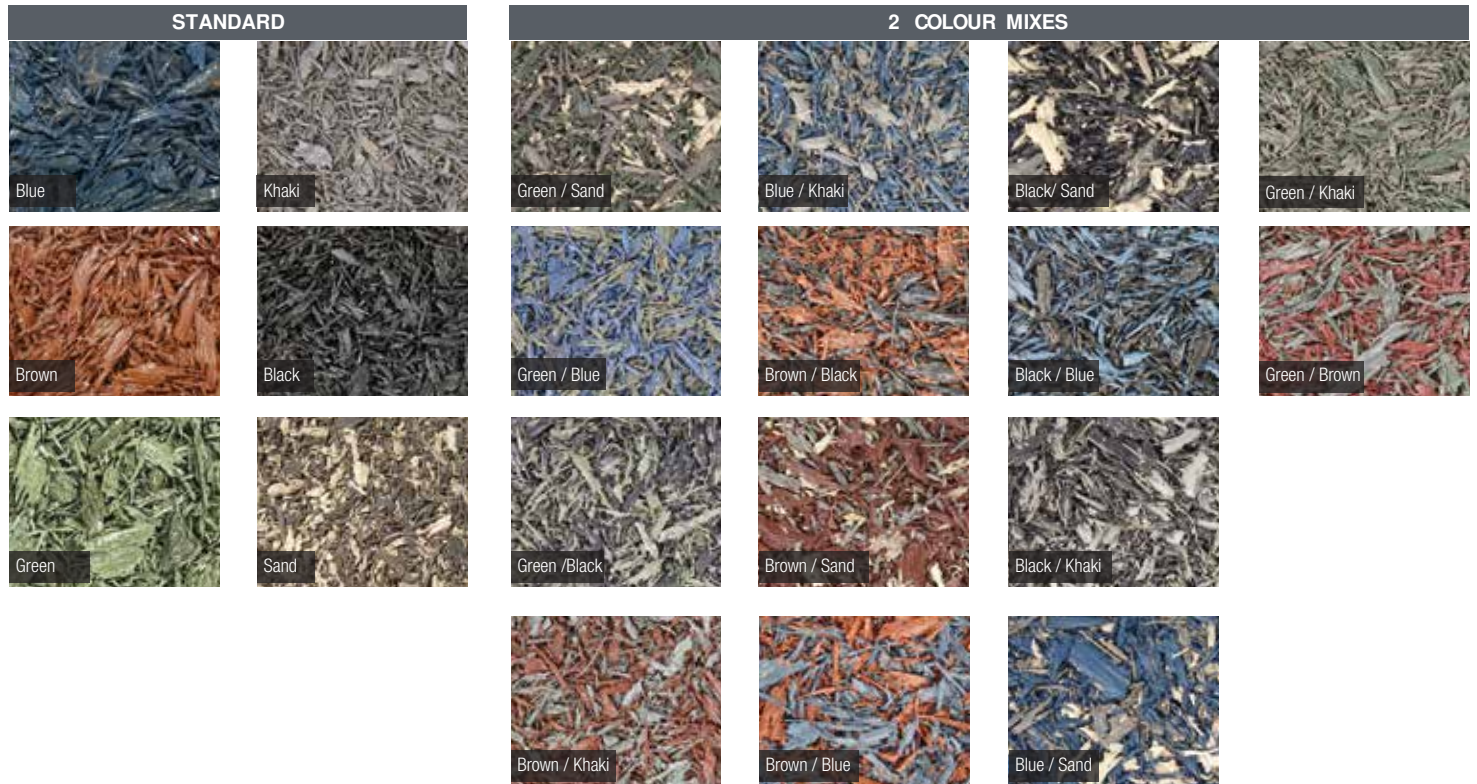


Base

Rubber Mulch can be used to cover over almost any existing surface. The base must be dry and of sound construction.

SURFACE DEPTH	CONCRETE	MACADAM	WETPOUR	FLAGS	SOIL / GRASS	MOT TYPE 1
40-60mm	✓	✓	✓	✓	✓	✓

CRITICAL FALL HEIGHT ACHIEVED

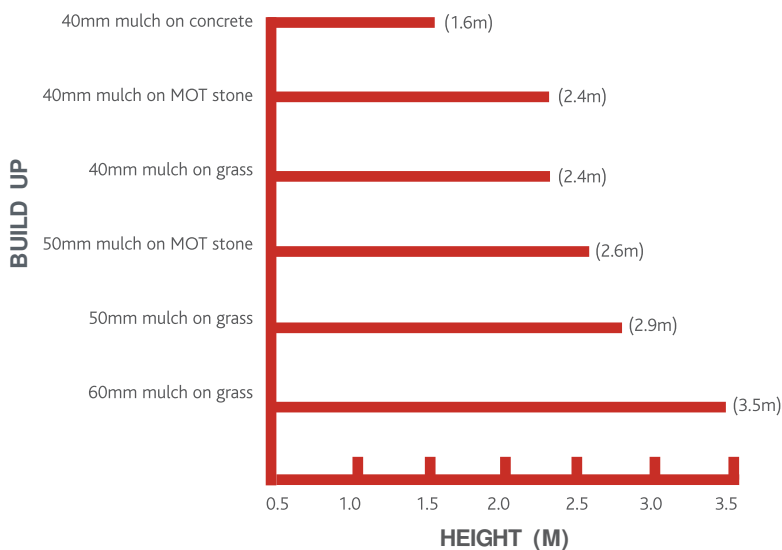

CRITICAL FALL HEIGHT

A Critical Fall Height (CFH) is the maximum height of fall from play equipment to the ground. It is important to note that safety surfaces do not prevent injury but aim to lessen the severity of any injury that may occur when falling from a height.

RUBBER MULCH KEY FEATURES

- 100% wire and fabric free
- Made from 100% solid recycled rubber tyres
- Colour coated five times for long-lasting colour retention
- High critical fall heights achieved with minimum depth
- Lowest possible risk of flammability
- 100% solvent free binder

CERTIFICATIONS:

- Fire resistant - BS EN 7188;1988 + A2;2009
- Non slip - BS EN 7188; 1988 + A2;2009
- Resistant to abrasive wear - BS EN 7188;1988 + A2;2009
- Resistant to indentation - BS EN 7188;1988 + A2;2009
- Non leaching
- Non toxic – Oral tested to toy safety rating BS EN71-3
- Skin contact - PAH-XP X 33-012.