

Artificial Grass is porous and low maintenance. The grass is soft to touch and a clean, hygienic alternative to traditional grass.

When used for play surfaces, we install a soft rubber base beneath the carpet. This ensures safe play when Critical Fall Heights of up to 1.2m** are required.

Artificial Grass is often installed alongside Wetpour, Rubber-Gravel mix or Rubber Mulch to create areas of themes and contrasting textures.

> We have worked with DCM on many outdoor play projects over the years, and turned to them for their expertise in installing EPDM, Mulch and Artificial Grass.

The quality of the work is excellent and we would have no hesitation in recommending DCM to anyone.


Business Development Manager, Setter Play Ltd.



Key Specifications

- Soft and natural looking
- Bespoke grass creates unlimited design possibili
- Wide range of colours and yarn
- No muddy feet
- Achieve Critical Fall Heights of up to 1.2m**
- Low maintenance
- Constructed with drainage to stay dry underfoo

RECOMMENDED BUILD UP TO CREATE A PERME

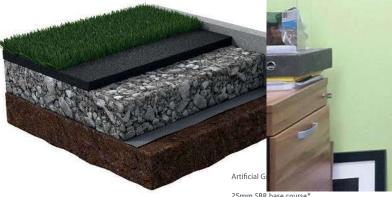

25mm SBR base course

Min 50-100mm MOT Type 1 20mm to dust (non-recycled). Laid, level and compacted to the

Geotextile membrane

Edge options: Rubber, Concrete, Aluminium

*Standard build up. Depths may vary depending on use/sub-base

**When applied to a 38mm SBR base course.

T. +44 (0)1772 440340 E. info@dcmsurfaces.com

WWW.DCMSURFACES.COM

ARTIFICIAL PLAY GRASS

The base must be dry and of sound construction.

LAID TO	CONCRETE	MACADAM	WETPOUR	FLAGS	SOIL / GRASS	MOT TYPE 1
No Shockpad	√	✓	✓	×	×	×
15mm SBR	✓	✓	✓	×	×	×
25mm SBR	✓	√	✓	√	×	✓
Sand	×	×	×	×	×	√

Shockpad Technical Data

TECHNICAL DATA	VALUE		
Material	SBR rubber. 8% min binder content.		
Curing Period	4-24 hours, dependent on area size.		













